FUSION

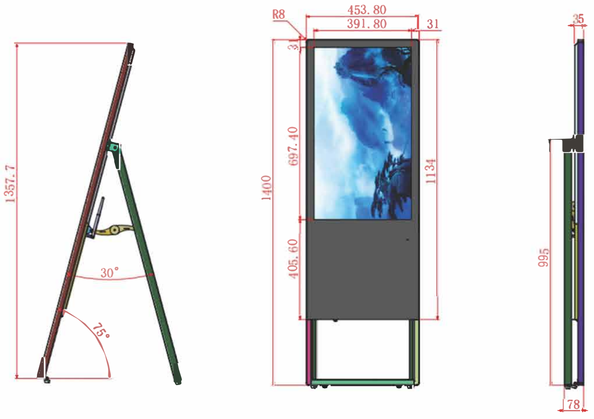

Panel	brand	BOE	Model Name	HV320FHB-N02
	screen size	32.00''	Screen type	Liquid crystal glass, a-SI TFT-LCD
	Resolution	1920(RGB)×1080[FHD]69PPI	Pixel configuration	RGB vertical bar
	Display size	698.4 × 392.85 mm (H×V)	physical dimension	7084×4054×1.36mm (H×VxD)
	Visual size	_	Surface treatment	Matte surface (Haze 1%), Hard coating (3H)
	Brightness (cd/m2)	0	Contrast	1200:1 (Typ.) [Transmission]
	Best angle	Full view	Optical mode	ADSDS, normally black display, transmissive
	Viewing angle	89/89/89/89 (Typ.)(CR≥10)	Responsiveness	8 (Typ.) (G to G) ms
	glass thickness	0.50+0.50 mm	Transmittance	5.0% (Typ.) (including polarizer)
	Number of colors	16.7M , 72% NTSC	Backlight type	No backlight
	Screen weight	850g (Typ.)	signal system	LVDS (2 ch, 8-bit), connector, 51 pins
	Refresh rate	60Hz	Supply voltage	12.0V (Typ.)
	Driver IC	Bonded COF 6 source chips	Maximum rating	Storage temperature: -20 ~ 60 °C Working temperature: 0 ~ 60 °C

Parameter	Display Resolution	1920*1080
	Contrast	1400:1typ
	Maximum Brightness	350cd/㎡
	Image Ratio	16:9
	Visual Angle	178°
	Color	16.7M
	Input Voltage	AC110-240V (50Hz-60Hz)
Play system	Motherboard	Allwinner A40I
	CPU	Allwinner A40I strongest quad-core 1.8GHz Cortex-A17 quad-core GPU Mail-T764
	system	9.0 Android system
	ROM	ROM:16GB
	RAM	RAM: 1GB
	Play mode	Support multiple playback modes such as looping, timing, interstitial, etc.
	Decoding resolution	Support up to 3840*2160
	Split screen playback	Support horizontal screen, vertical screen, full screen and split screen playback
	Time switch play	5 switches per day, seven days a week can be set up, 24 hours unmanned management
	Audio/Sound	Left channel, right channel, 8Ω5W speaker
	Support subtitles	You can set mobile subtitles, and play subtitles in commercials
	Image Format	Support JPG, BMP, PNG, GIF and other image format browsing and support rotation/slide show, up to 4096*4096 resolution
	Play file format	Video: All video formats Music: MP3 style music
	Network Interface	RJ45/IEEI802.31/100M ETHERNET LAN; WIFI
	Network support	3G, Ethernet, support WiFi/Bluetooth 4.0, wireless peripheral expansion
	Log management	Support terminal log and program log management
	TF card	Support TF card
	Ethernet	10M/100M/1000M adaptive Ethernet
	Switch machine	Manual switch machine, automatic timing switch machine.
	Background operation software	LAN/Internet, B/S management software
	Language	Simplified Chinese, Traditional Chinese, English and other languages
	GPS	External GPS (optional)
Shell	Material	The body adopts 1.5mm advanced metal sheet metal and full tempered glass
	Frame	All aluminum with high hardness, colors: silver, black, white (customized, other colors can also be customized)
	Spray paint	Metal baking paint (color can be sprayed as needed)
Shipment	annex	wifi antenna, power cord
	package	Foam and carton packaging

Warranty

(1) One year warranty for the whole machine
During the warranty period, quality problems caused by normal use, such as color difference, touch failure, etc. (Does not include man-made damage)
(2) Charged warranty
For quality problems arising from abnormal use, maintenance fees will be charged depending on the degree of damage.
(3) Special Instructions——Man-made damage cannot be warranty.
Liquid crystal is a glass product. If it is dropped from a high place or hit hard, it may cause the screen to burst and the broken lens cannot be reshaped.

Space Tower, Abdulaziz Hamad Al Saqer Street, Kuwait City, Al Asimah, Kuwait, Tel. +965 65614272,
email: signogramkw@gmail.com